




SAWAN[®]

R O P E S



BUILT TO LAST
PRODUCT PORTFOLIO



Our Story

At Sawan Ropes it's our belief that we learn the rope of life by untying its knots. Sawan Ropes Manufacturing Unit in Jamnagar, Gujarat is the newest addition to the Sawan India Overseas family, that has had a global presence in various industries for over 30 years and counting. With an average annual output of 1500 metric tonnes, Sawan Ropes is in the pursuit of becoming one of the largest Ropes manufacturers within the region. At Sawan Ropes we are continuously dedicated to understand and implement efficient production processes adding value towards the quality of our ropes.

Vision

At Sawan Ropes our aim is to become one of the leading providers of superior customer value through our products and services. We aspire to be one of the most valuable companies for all our stakeholders by effectively fulfilling all our responsibilities towards them.


Mission

At Sawan Ropes we believe it is our duty to meet the emerging demands of our clients through continuously dedicating ourselves in providing highest quality oriented Ropes with the utmost honesty to ensure everlasting trust with our clients and partners.



Our Manufacturing

At Sawan Ropes we manufacture PE Monofilament ropes, PP Danline ropes, PP Multifilament ropes, Braided Ropes PE Twine and many more.

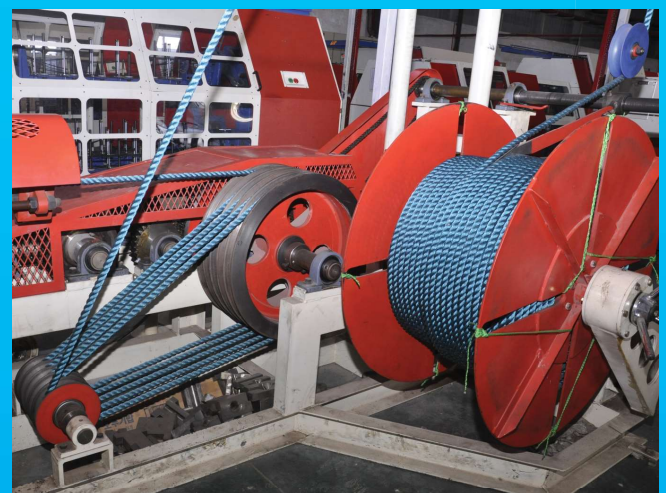

SAWAN ROPES PRODUCT CHARACTERISTICS

| PE MONOFILAMENT | | | PP DANLINE | | | PPMF | | | BRAIDED ROPES | | |
|-----------------|--------------------|-----------------------|----------------|--------------------|-----------------------|----------------|--------------------|-----------------------|------------------|----------------------|-----------------------|
| Rope Size (mm) | Coil Weight 220mtr | Breaking Strength kgf | Rope Size (mm) | Coil Weight 220mtr | Breaking Strength kgf | Rope Size (mm) | Coil Weight 220mtr | Breaking Strength kgf | Rope Size (mm) | Coil Weight 220mtr | Breaking Strength kgf |
| 4 | 1.63 | 200 | 4 | 1.63 | 240 | 4 | 1.63 | 240 | 4 | 1.63 | 240 |
| 5 | 2.30 | 242 | 5 | 2.30 | 310 | 5 | 2.30 | 330 | 5 | 2.30 | 330 |
| 6 | 3.67 | 400 | 6 | 3.67 | 600 | 6 | 3.67 | 640 | 6 | 3.67 | 640 |
| 7 | 4.95 | 510 | 7 | 4.95 | 740 | 7 | 4.95 | 760 | 7 | 4.95 | 760 |
| 8 | 6.60 | 700 | 8 | 6.60 | 1060 | 8 | 6.60 | 1090 | 8 | 6.60 | 1090 |
| 9 | 8.10 | 1070 | 9 | 8.10 | 1190 | 9 | 8.10 | 1210 | 9 | 8.10 | 1210 |
| 10 | 10.00 | 1090 | 10 | 10.00 | 1560 | 10 | 10.00 | 1580 | 10 | 10.00 | 1580 |
| 12 | 14.50 | 1540 | 12 | 14.50 | 2210 | 12 | 14.50 | 2240 | PE TWINE | | |
| 14 | 20.00 | 2090 | 14 | 20.00 | 3050 | 14 | 20.00 | 3080 | | | |
| 16 | 25.50 | 2800 | 16 | 25.50 | 3770 | 16 | 25.50 | 3790 | Twine Size (ply) | Hanks Weight (grams) | Breaking Strength kgf |
| 18 | 32.50 | 3500 | 18 | 32.50 | 4810 | 18 | 32.50 | 4850 | 18 | 130 | 20.6 |
| 20 | 40.00 | 4300 | 20 | 40.00 | 5800 | 20 | 40.00 | 5870 | 21 | 130 | 24.2 |
| 22 | 48.50 | 5100 | 22 | 48.50 | 6960 | 22 | 48.50 | 6990 | 24 | 130 | 27.2 |
| 24 | 57.60 | 6100 | 24 | 57.60 | 8130 | 24 | 57.60 | 8160 | 36 | 130 | 41.0 |
| 26 | 67.60 | 6930 | 26 | 67.60 | 9410 | 26 | 67.60 | 9450 | 42 | 130 | 46.7 |
| 28 | 78.40 | 8000 | 28 | 78.40 | 10700 | 28 | 78.40 | 10760 | 45 | 130 | 57.5 |
| 30 | 90.00 | 9486 | 30 | 90.00 | 12220 | 30 | 90.00 | 12280 | 48 | 130 | 61.5 |
| 32 | 102.40 | 10710 | 32 | 102.40 | 13500 | 32 | 102.40 | 13590 | 54 | 130 | 66.3 |
| 34 | 115.60 | 11900 | 34 | 115.60 | 14400 | 34 | 115.60 | 14430 | 60 | 130 | 69.0 |
| 36 | 129.60 | 13460 | 36 | 129.60 | 16900 | 36 | 129.60 | 16940 | 72 | 130 | 82.2 |
| 38 | 144.40 | 14800 | 38 | 144.40 | 17700 | 38 | 144.40 | 17720 | | | |
| 40 | 160.00 | 16500 | 40 | 160.00 | 20500 | 40 | 160.00 | 20570 | | | |

- Ropes can be customized in different shades of colours as per customer requirement.
- Ropes can be supplied in different lengths as per customer requirement.
- Ropes can be supplied in various arrangements including coils, spools, hanks and drums.
- Other requirements including packaging can be customised according to the customer.

Technical Specifications[®]


- Melting Temperature: 165°C
 - Water Absorption: Nil
 - UV Stabilization: Good
- Abrasion Resistance: Good
- Chemical Resistant: Excellent
 - Elongation: Good
- Construction: 3 and 4 strand
 - Twist: Z and S twist
 - Certification: BIS and Germanischer Lloyd

Salient Features

- High strength and light weight
- UV stabilised great for outdoor
- Floats on water, no water absorption
- Flexible for quick knotting

Application Features

Fisheries, Marine, Telecom Industries, Shipping Industry, Heavy Lifting, Safety Equipment, Agricultural, Construction, Transportation and many more...

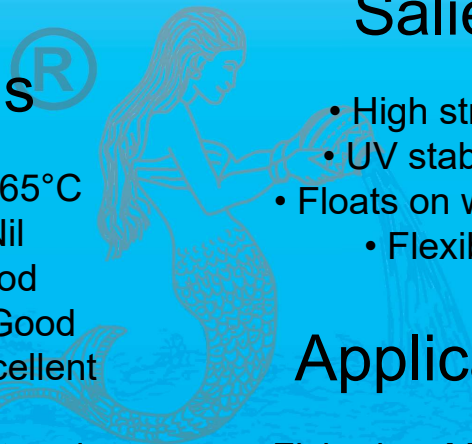

Since 1999, we have consistently grown to reach over 75 countries through our undying passion towards quality. Our continuous effort is to create highest quality synthetic rope and netting for a wide array of applications. Our manufacturing strength is spread across multiple locations through India.



AN ISO Certified 9001:2015
Certified No.
PCMS/QMS/2543-2015

The threads of trust, faith, efficacy and respect tie every element of life. We have spent the last 20 years understanding the beauty of this relationship and engineering these qualities into our products.



SAWAN INDIA OVERSEAS

Khatia Beraja Patia, Jamnagar-Khambhalia Highway,
Khatia Beraja, Taluka: Lalpur, Dist: Jamnagar
Gujarat, 361010, India

Contact number: +91-9878448888

Email: sales@sawanropes.com

Website: www.sawanropes.com